NOC WALL

DESIGN BY SMITHMATTHIAS

Noc Wall is an adaptable die-cast aluminium wall light with a faceted shade and a smooth powder coat finish. The rotating mechanism provides two points of adjustment and the main light is fixed into the wall-mounted bracket allowing the cable to hang freely from the light to be plugged into a wall socket. Noc Wall is a versatile light for everyday use in both domestic and commercial settings. It is supplied with a bulb and a two-metre cable with inline switch. Noc Wall is available in dark grey and off white.

PRODUCT DETAILS

/ Part of a progressive and technologically advanced lighting collection.
/ A flexible, engineered clip light with character.
/ CE approved.
/ Supplied with a replaceable standard E14 LED bulb with an estimated life span of 25.000 hours of use.
/ Available in two variants; with touch sensitive button and integrated cable or with external cable and inline switch.
/ Suitable for both private and office environments.
/ Qualified for contract use.
/ For indoor use only.

HAY

MATERIAL

LAMP STEM AND BASE / Machined aluminum.

LAMP SHADE / Die cast aluminum.

CORD / Silicone cable.

Please note that the cable is black for the dark grey version and white for the off white version.

COLOUR & FINISH

Please note that the colour codes are indicative.

Available in 2 different colours.
/ Dark grey (RAL 7016)
/ Off white (Pantone 1C)

DARK GREY   OFF WHITE

DIMENSIONS

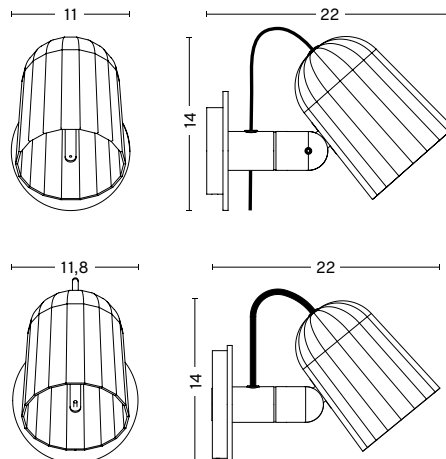WALL
WIDTH / 11 cm / 4.3"
DEPTH / 22 cm / 8.7"
HEIGHT / 14 cm / 5.5"

WALL BUTTON
WIDTH / 11,8 cm / 4.6"
DEPTH / 22 cm / 8.7"
HEIGHT / 14 cm / 5.5"

TECHNICAL SPECIFICATIONS

/ LIGHT SOURCE* / LED E14 (A15)
/ POWER (watts) / 5,5W
/ DIMMABLE / No
/ POWER SUPPLY / 220-240V AC at 50-60Hz
/ CORD LENGTH / 200 cm / N/A on Noc Wall Button
/ SWITCH / Inline Switch / Integrated switch on Noc Wall
  Button

*Bulb included.

TEST SPECIFICATIONS*

/ FLUX (lumens) / 470lm
/ CCT (kelvin) / 2800k, warm white
/ CRI (1-100) / 85

*Photometrics and the specification shown is taken using the included LED bulb fitted in the production luminaire.
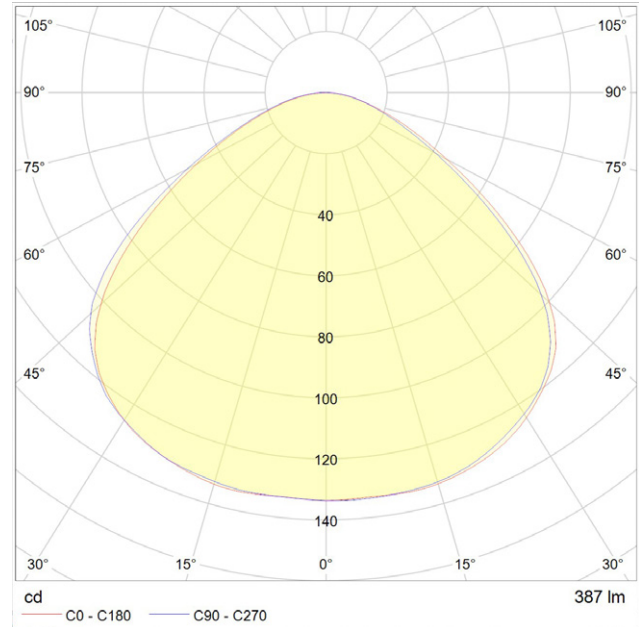
CERTIFICATIONS

/ CE approved: This product has been assessed and complies with the essential requirements of the relevant European directives.

LED ⬚ CE 〈F〉 IP20 ▢ ⌧

Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including:

/ EN 55015:2013 (radio disturbance)
/ EN 61547:2009 (EMC immunity)
/ EN 61000-3-2:2014 (EMC compatibility)
/ EN 61000-3-3:2013 (EMC compatibility)
/ EN 60598-2-4:1997 (portable luminaires)
/ EN 60598-1:2015 (general requirements)
/ EN 62493:2010 (human exposure to EMC)

PHOTOMETRICS

cd   C0 - C180   C90 - C270   387 lm

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance instructions, CE attestation of conformity certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

Link to downloads.

HAY

14/09/2020